



TYPICAL CONSTRUCTION SHAPE

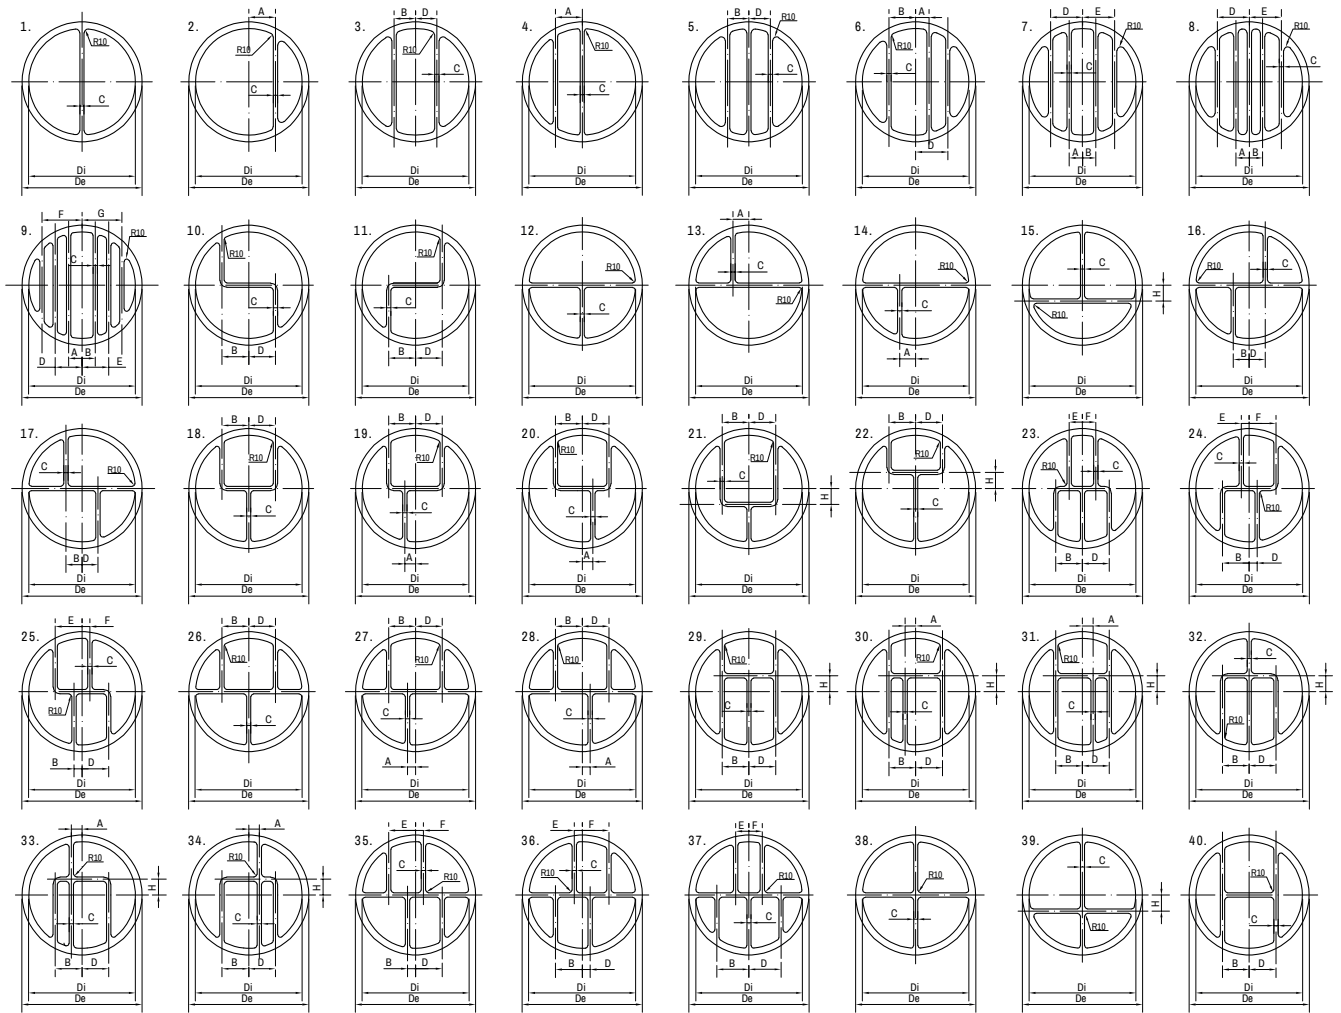


Typical sections:

metalljacketed gasket *:



*flat side viewing


kammprofile gasket:




spiral wound gasket:



soft / solid gasket:



tanged graphite gasket:



Notes:

a. dimensional tolerances are :

dimensions - mm	Ø external - mm	Ø internal - mm	thickness - mm
0 - 500	+ 0 / - 0.7	+ 0.7 / - 0	± 0.8
500 - 1000	+ 0 / - 1.0	+ 1.0 / - 0	± 0.8
1000 - 1500	+ 0 / - 1.5	+ 1.5 / - 0	± 0.8
1500 - 2000	+ 0 / - 2.0	+ 2.0 / - 0	± 0.8

b. shapes tolerances are :

dimensions - mm	cylindrical shape tolerance - mm
0 - 500	1
500 - 1000	1.5
1000 - 1500	2
1500 - 2000	3

c. corner radius R shall be 10 mm

