


# STANDARD OVAL AND OCTAGONAL RJ ASME BI6.5

**Notes:**

- Under axial compressive load, ring joint gasket plastically deform and flow into irregularities of the flange groove: the seal is maintained by the action of this force upon the gasket.
- It is imperative that the gasket be significantly softer than the flange to not damage it during assembly.
- R, Rx and BX type are according to ANSI B16.5, API-Std.6A.
- R type typical sections :

Oval type

Octagonal type

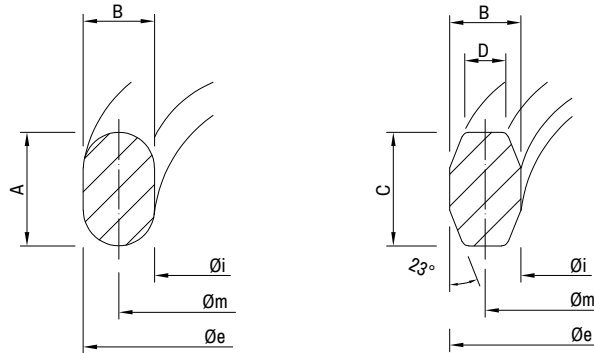

- Are manufactured in both oval and octagonal configuration.
- Are designed to seal pressure up to 6250 psi (for ASME B 16.5 pressure rating) and up to 5000 psi (for API 6A pressure rating).
- Requested surface finish: 63 µin Ra - 1.6 µm Ra.
- Gasket seating factors:

Material	Factor m	Factor y (PSI)
Iron or soft metal	5.50	18000
Monel or 4-6 % Cr	6.00	21800
Stainless steel	6.50	26000

100	ASME-ANSI B16.5					API 6A					Tolerances	± 0.38	± 0.38	± 0.17	± 0.39	± 0.39	± 0.20	± 0.20	Weight	
	1/2	3/4	1	1 1/2	2	1/2	3/4	1	1 1/2	2									R	Øe (mm)
-	1/2	-	-	-	-	-	-	-	-	-	R11	40.48	27.28	34.13	11.11	9.52	6.35	4.30	0.05	0.05
-	-	1/2	1/2	-	-	-	-	-	-	-	R12	47.61	31.75	39.68	14.29	12.70	7.94	5.23	0.10	0.10
-	-	-	3/4	3/4	-	-	-	-	-	-	R13	50.79	34.93	42.86	14.29	12.70	7.94	5.23	0.10	0.10
-	-	-	-	1	-	-	-	-	-	-	R14	52.38	36.52	44.45	14.29	12.70	7.94	5.23	0.11	0.11
1	-	-	-	-	-	-	-	-	-	-	R15	55.55	39.69	47.62	14.29	12.70	7.94	5.23	0.12	0.11
-	1	1	1	3/4	-	-	1	1	1	-	R16	58.73	42.87	50.08	14.29	12.70	7.94	5.23	0.12	0.11
1 1/2	-	-	-	-	-	-	-	-	-	-	R17	65.08	49.22	57.15	14.29	12.70	7.94	5.23	0.14	0.13
-	1 1/2	1 1/2	1 1/2	1	-	-	1 1/2	1 1/2	1 1/2	-	R18	68.25	52.39	60.32	14.29	12.70	7.94	5.23	0.15	0.14
1 1/2	-	-	-	-	-	-	-	-	-	-	R19	73.01	57.15	65.08	14.29	12.70	7.94	5.23	0.16	0.15
-	1 1/2	1 1/2	1 1/2	-	-	-	1 1/2	1 1/2	1 1/2	-	R20*	76.19	60.33	68.26	14.29	12.70	7.94	5.23	0.17	0.15
-	-	-	-	1 1/2	-	-	-	-	-	-	R21	83.34	61.12	72.23	17.46	15.88	11.11	7.76	0.30	0.29
2	-	-	-	-	-	-	-	-	-	-	R22	90.48	74.62	82.55	14.29	12.70	7.94	5.23	0.20	0.19
-	2	-	-	1 1/2	-	-	2	-	-	-	R23*	93.66	71.44	82.55	17.46	15.88	11.11	7.76	0.34	0.33
-	-	2	2	-	-	-	-	2	2	-	R24*	106.36	84.14	95.25	17.46	15.88	11.11	7.76	0.39	0.38
2 1/2	-	-	-	-	-	-	-	-	-	-	R25	109.53	93.67	101.60	14.29	12.70	7.94	5.23	0.25	0.23
-	2 1/2	-	-	2	-	-	2 1/2	-	-	-	R26*	112.71	90.49	101.60	17.46	15.88	11.11	7.76	0.42	0.41
-	-	2 1/2	2 1/2	-	-	-	-	2 1/2	2 1/2	-	R27*	119.06	96.84	107.95	17.46	15.88	11.11	7.76	0.45	0.43
-	-	-	-	2 1/2	-	-	-	-	-	-	R28	123.82	98.42	111.12	19.05	17.46	12.70	8.66	0.57	0.55
3	-	-	-	-	-	-	-	-	-	-	R29	122.23	106.37	114.30	14.29	12.70	7.94	5.23	0.28	0.26
-	3	-	-	-	-	-	-	-	-	-	R30	128.58	106.36	117.47	17.46	15.88	11.11	7.76	0.48	0.47
-	-	3	-	-	-	-	-	3	3	-	R31*	134.93	112.71	123.82	17.46	15.88	11.11	7.76	0.51	0.50
-	-	-	3	-	-	-	-	-	-	-	R32	139.70	114.30	127.00	19.05	17.46	12.70	8.66	0.65	0.63
3 1/2	-	-	-	-	-	-	-	-	-	-	R33	139.69	123.83	131.76	14.29	12.70	7.94	5.23	0.32	0.30
-	3 1/2	-	-	-	-	-	-	-	-	-	R34	142.87	120.65	131.76	17.46	15.88	11.11	7.76	0.54	0.52
-	-	-	3	-	-	-	-	-	3	-	R35*	147.63	125.41	136.52	17.46	15.88	11.11	7.76	0.56	0.55
4	-	-	-	-	-	-	-	-	-	-	R36	157.15	141.29	149.22	14.29	12.70	7.94	5.23	0.37	0.34
-	4	-	-	-	-	-	4	4	3 1/2	-	R37*	160.33	138.11	149.22	17.46	15.88	11.11	7.76	0.62	0.60
-	-	-	4	-	-	-	-	-	4	-	R38	173.03	141.29	157.16	22.22	20.64	15.88	10.49	1.16	1.14
-	-	-	-	4	-	-	-	-	4	-	R39*	173.03	150.81	161.92	17.46	15.88	11.11	7.76	0.67	0.65
5	-	-	-	-	-	-	-	-	-	-	R40	179.38	163.52	171.45	14.29	12.70	7.94	5.23	0.42	0.39
-	5	-	-	-	-	-	5	5	-	-	R41*	192.08	169.85	180.97	17.46	15.88	11.11	7.76	0.75	0.73
-	-	-	-	5	-	-	-	-	-	-	R42	209.55	171.45	190.50	25.40	23.81	19.05	12.32	1.91	1.88
6	-	-	-	-	-	-	-	-	-	-	R43	201.60	185.74	193.67	14.29	12.70	7.94	5.23	0.48	0.44
-	-	-	-	5	-	-	-	-	5	-	R44*	204.78	182.56	193.67	17.46	15.88	11.11	7.76	0.80	0.78
-	6	-	-	-	-	-	6	6	-	-	R45*	222.24	200.02	211.13	17.46	15.88	11.11	7.76	0.87	0.85
-	-	-	-	6	-	-	-	-	6	-	R46*	223.83	196.43	211.13	19.05	17.46	12.70	8.66	1.08	1.05
-	-	-	-	-	-	-	-	-	-	-	R47*	247.65	209.55	228.60	25.40	23.81	19.05	12.32	2.29	2.26
8	-	-	-	-	-	-	-	-	-	-	R48	255.58	239.72	247.65	14.29	12.70	7.94	5.23	0.61	0.56
-	8	-	-	-	-	-	8	8	-	-	R49*	280.98	258.76	269.87	17.46	15.88	11.11	7.76	1.11	1.09
-	-	-	-	8	-	-	-	-	8	-	R50*	285.74	254.00	269.87	22.22	20.64	15.88	10.49	1.99	1.95
-	-	-	-	-	-	-	-	-	-	-	R51	301.62	257.18	279.40	28.58	26.99	22.22	14.81	3.65	3.69
10	-	-	-	-	-	-	-	-	-	-	R52	312.73	296.87	304.80	14.29	12.70	7.94	5.23	0.75	0.69
-	10	-	-	-	-	-	10	10	-	-	R53*	334.96	312.74	323.85	17.46	15.88	11.11	7.76	1.34	1.30
-	-	-	-	10	-	-	-	-	10	-	R54*	339.72	307.98	323.85	22.22	20.64	15.88	10.49	2.39	2.35
-	-	-	-	-	-	-	-	-	-	-	R55	371.47	314.33	342.90	36.51	34.92	28.58	19.81	7.35	7.68
12	-	-	-	-	-	-	-	-	-	-	R56	388.93	373.07	381.00	14.29	12.70	7.94	5.23	0.93	0.87
-	12	-	-	-	-	-	12	12	12	-	R57*	392.11	369.89	381.00	17.46	15.88	11.11	7.76	1.57	1.53



## Changing RJ gasket:

- Open the flanged joint and remove the old RJ gasket.
- Clean very well all surfaces from eventual residual grease or/and rust.
- Check all flange contact surfaces : it is imperative that the new gasket and the groove sealing faces are free from indentations, score marks, chatter marks.
- Put the new RJ gasket in its seat: verify centering between flange and RJ.
- Close the flanged joint.


ASME-ANSI B16.5					ASME B16.47					API 6A					Tolerances		± 0.38		± 0.36		± 0.17		± 0.39		± 0.39		± 0.20		± 0.20		Weight	
150	300-600	900	1500	2500	200-600	900	2000	3000	6000	R	Øe (mm)	Øi (mm)	Øm (mm)	A (mm)	C (mm)	B (mm)	D (mm)	Øout (Pp)	Øout (Pg)													
-	-	-	12	-	-	-	-	-	-	R58	403.22	358.78	381.00	28.58	26.99	22.22	14.81	4.98	5.03													
14	-	-	-	-	-	-	-	-	-	R59	404.80	388.94	396.87	14.29	12.70	7.94	5.23	0.98	0.90													
-	-	-	-	12	-	-	-	-	-	R60	438.15	374.65	406.40	39.68	38.10	31.75	22.33	10.47	11.09													
-	14	-	-	-	14	-	14	14	-	R61	430.21	407.99	419.10	17.46	15.88	11.11	7.76	1.73	1.69													
-	-	14	-	-	-	14	-	-	-	R62	434.97	403.23	419.10	22.22	20.64	15.88	10.49	3.09	3.04													
-	-	-	14	-	-	-	-	-	-	R63*	444.50	393.70	419.10	33.33	31.75	25.40	17.30	7.33	7.54													
16	-	-	-	-	-	-	-	-	-	R64	461.95	446.09	454.02	14.29	12.70	7.94	5.23	1.12	1.03													
-	16	-	-	-	16	-	16	-	-	R65*	481.01	458.79	469.90	17.46	15.88	11.11	7.76	1.94	1.89													
-	-	16	-	-	-	16	-	16	-	R66*	485.77	454.03	469.90	22.22	20.64	15.88	10.49	3.47	3.40													
-	-	-	16	-	-	-	-	-	-	R67	498.47	441.33	469.90	36.51	34.92	28.58	19.81	10.07	10.53													
18	-	-	-	-	-	-	-	-	-	R68	525.45	509.59	517.52	14.29	12.70	7.94	5.23	1.28	1.18													
-	18	-	-	-	18	-	18	-	-	R69*	544.51	522.29	533.40	17.46	15.88	11.11	7.76	2.20	2.15													
-	-	18	-	-	-	18	-	18	-	R70*	552.45	514.35	533.40	25.40	23.81	19.05	12.32	5.35	5.27													
-	-	-	18	-	-	-	-	-	-	R71	561.97	504.83	533.40	36.51	34.92	28.58	19.81	11.43	11.95													
20	-	-	-	-	-	-	-	-	-	R72	566.73	550.87	558.80	14.29	12.70	7.94	5.23	1.38	1.27													
-	20	-	-	-	20	-	20	-	-	R73*	596.90	571.50	584.20	19.05	17.46	12.70	8.66	2.99	2.92													
-	-	20	-	-	-	20	-	20	-	R74*	603.25	595.15	584.20	25.40	23.81	19.05	12.32	5.85	5.77													
-	-	-	20	-	-	-	-	-	-	R75	615.95	552.45	584.20	39.68	38.10	31.75	22.33	15.05	15.94													
24	-	-	-	-	-	-	-	-	-	R76	681.03	695.17	673.10	14.29	12.70	7.94	5.23	1.66	1.53													
-	24	-	-	-	24	-	-	-	-	R77	708.02	676.28	692.15	22.22	20.64	15.88	10.49	5.11	5.01													
-	-	24	-	-	-	24	-	-	-	R78	717.55	696.75	692.15	33.33	31.75	25.40	17.30	12.10	12.46													
-	-	-	24	-	-	-	-	-	-	R79	727.07	657.23	692.15	44.45	41.28	34.93	24.82	22.58	22.06													
-	-	-	-	22	-	-	-	-	-	R80	623.88	608.02	615.95	14.29	12.70	7.94	5.23	1.52	1.40													
-	-	-	-	-	22	-	-	-	-	R81	649.28	620.72	635.00	20.64	19.05	14.29	9.58	4.05	3.86													
-	-	-	-	-	-	-	-	1	-	R82*	68.26	46.04	57.15	(17.46)	15.88	11.11	7.75	-	0.23													
-	-	-	-	-	-	-	-	-	1 1/2	R84*	74.61	52.39	63.50	(17.46)	15.88	11.11	7.75	-	0.25													
-	-	-	-	-	-	-	-	-	2	R85*	92.07	66.67	73.37	(19.05)	17.46	12.70	8.66	-	0.40													
-	-	-	-	-	-	-	-	-	2 1/2	R86*	106.36	74.62	90.49	(22.22)	20.64	15.88	10.49	-	0.65													
-	-	-	-	-	-	-	-	-	3	R87*	115.88	84.14	100.01	(22.22)	20.64	15.88	10.49	-	0.72													
-	-	-	-	-	-	-	-	-	4	R88*	142.88	104.78	123.83	(25.40)	23.81	19.05	12.32	-	1.22													
-	-	-	-	-	-	-	-	-	3 1/2	R89*	133.35	95.25	114.30	(25.40)	23.81	19.05	12.32	-	1.13													
-	-	-	-	-	-	-	-	-	5	R90*	177.80	133.36	155.58	(28.58)	26.99	22.23	14.81	-	2.05													
-	-	-	-	-	-	-	-	-	10	R91*	292.10	228.60	260.35	(41.02)	38.10	31.75	22.33	-	7.10													
-	-	-	-	-	-	-	-	-	-	R92	239.71	217.49	228.60	17.46	15.88	11.11	7.75	0.94	0.92													
-	-	-	-	-	26	-	-	-	-	R93	768.35	730.25	749.30	(25.40)	23.81	19.05	12.32	-	7.40													
-	-	-	-	-	28	-	-	-	-	R94	819.15	781.05	800.10	(25.40)	23.81	19.05	12.32	-	7.90													
-	-	-	-	-	30	-	-	-	-	R95	876.30	838.20	857.25	(25.40)	23.81	19.05	12.32	-	8.47													
-	-	-	-	-	32	-	-	-	-	R96	906.82	892.18	914.40	(28.58)	26.99	22.23	14.81	-	12.08													
-	-	-	-	-	34	-	-	-	-	R97	967.42	942.98	965.20	(28.58)	26.99	22.23	14.81	-	12.75													
-	-	-	-	-	36	-	-	-	-	R98	1044.57	1000.13	1022.35	(28.58)	26.99	22.23	14.81	-	13.51													
-	-	-	-	-	-	8	8	-	-	R99*	246.06	223.85	234.95	(17.46)	15.88	11.11	7.75	-	0.95													
-	-	-	-	-	-	28	-	-	-	R100	777.87	729.72	749.30	(36.51)	34.93	28.58	19.81	-	16.79													
-	-	-	-	-	-	28	-	-	-	R101	831.85	768.35	800.10	(39.68)	38.10	31.75	22.33	-	21.83													
-	-	-	-	-	-	30	-	-	-	R102	869.00	825.50	857.25	(39.68)	38.10	31.75	22.33	-	23.39													
-	-	-	-	-	-	32	-	-	-	R103	946.15	882.65	914.40	(39.68)	38.10	31.75	22.33	-	24.95													
-	-	-	-	-	-	34	-	-	-	R104	1090.12	930.27	965.20	(44.45)	41.28	34.93	24.82	-	31.49													
-	-	-	-	-	-	36	-	-	-	R105	1057.27	987.42	1022.35	(44.45)	41.28	34.93	24.82	-	33.35													



## STANDARD BX RJ

### Notes:

- Under axial compressive load, ring joint gasket plastically deform and flow into irregularities of the flange groove: the seal is maintained by the action of this force upon the gasket.
- It is imperative that the gasket be significantly softer than the flange to not damage it during assembly.
- R, Rx and BX type are according to ANSI B16.5, API-Std.6A.
- BX type typical sections :

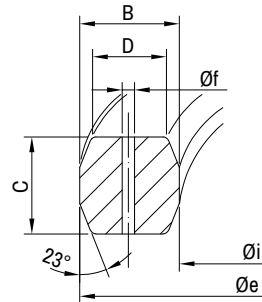

- All BX ring type joints incorporate a pressure passage hole to allow for pressure equalization each side of the sealing faces.
- Is not interchangeable with any other type: is only suited for API 6 BX flanges.
- Are planned to seal pressure up to 20000 psi in accordance with API 6 A pressure ratings.
- Requested surface finish: 32 µm Ra - 0.8 µm Ra.

Material	Factor m	Factor y (PSI)
Iron or soft metal	5.50	18000
Monel or 4-6 % Cr	6.00	21800
Stainless steel	6.50	26000


Pressure class rating (Lbs)						Tolerances	- 0.15	+ 0.15	+ 0.2	+ 0.2	-	Weight (Kg)
2000	3000	5000	10000	15000	20000	BX	Øe (mm)	Øi (mm)	B (mm)	C (mm)	ØF (mm)	
-	-	-	1 1/8	1 1/8	-	BX150	72.19	53.59	9.30	9.30	1.6	0.13
-	-	-	1 1/8	1 1/8	1 1/8	BX151	76.40	57.14	9.63	9.63	1.6	0.15
-	-	-	2 1/8	2 1/8	2 1/8	BX152	84.68	64.20	10.24	10.24	1.6	0.19
-	-	-	2 1/8	2 1/8	2 1/8	BX153	100.94	78.18	11.38	11.38	1.6	0.29
-	-	-	3 1/8	3 1/8	3 1/8	BX154	116.84	92.04	12.40	12.40	1.6	0.40
-	-	-	4 1/8	4 1/8	4 1/8	BX155	147.96	119.52	14.22	14.22	1.6	0.55
-	-	-	7 1/8	7 1/8	7 1/8	BX156	237.92	200.68	18.62	18.62	3.2	1.88
-	-	-	9	9	-	BX157	294.46	252.50	20.98	20.98	3.2	2.97
-	-	-	11	11	-	BX158	352.04	305.76	23.14	23.14	3.2	4.35
-	-	-	13 5/8	-	-	BX159	426.72	375.32	25.70	25.70	3.2	6.54
-	-	13 5/8	-	-	-	BX160	402.59	375.11	13.74	23.83	3.2	3.06
-	-	16 1/2	-	-	-	BX161	491.41	458.99	16.20	28.07	3.2	-
-	-	16 1/2	16 3/8	-	-	BX162	475.49	447.05	14.22	14.22	1.6	-
-	-	18 1/2	-	-	-	BX163	556.16	521.42	17.37	30.10	3.2	-
-	-	-	18 3/8	-	-	BX164	570.56	521.38	24.59	30.10	3.2	-
-	-	21 1/2	-	-	-	BX165	624.71	587.73	18.49	32.03	3.2	-
-	-	-	21 1/8	-	-	BX166	640.03	587.75	26.14	32.03	3.2	-
26 1/2	-	-	-	-	-	BX167	759.36	733.14	13.11	35.86	1.6	-
-	26 1/2	-	-	-	-	BX168	765.25	733.15	16.05	35.86	1.6	-
-	-	-	5 1/8	-	-	BX169	173.52	147.65	12.93	15.84	1.6	-
-	-	-	-	-	-	BX170	218.03	189.59	14.22	14.22	1.6	-
-	-	-	-	-	-	BX171	267.44	239.00	14.22	14.22	1.6	-
-	-	-	-	-	-	BX172	333.07	304.63	14.22	14.22	1.6	-
30	30	-	-	-	-	BX303	852.75	818.81	16.97	37.86	1.6	-



# STANDARD RX RJ

### Notes:

- Under axial compressive load, ring joint gasket plastically deform and flow into irregularities of the flange groove: the seal is maintained by the action of this force upon the gasket.
- It is imperative that the gasket be significantly softer than the flange to not damage it during assembly.
- R, Rx and BX type are according to ANSI B16.5, API-Std.6A.
- RX type typical section :

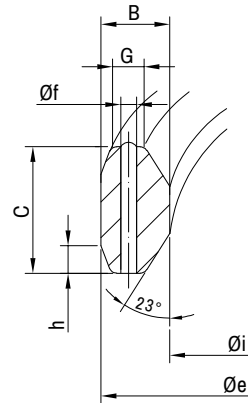

- Is interchangeable with the standard R type.
- Since the Style RX is significantly taller than a Style R, larger flange make up distances will result.
- Are designed to seal pressure as R type.
- Selected sizes incorporate a pressure passage hole to allow for pressure equalization each side of the sealing faces.
- Requested surface finish: 63 µin Ra - 1.6 µm Ra

Material	Factor m	Factor y (PSI)
Iron or soft metal	5.50	18000
Monel or 4-6 % Cr	6.00	21800
Stainless steel	6.50	26000

Pressure class rating (Lbs)			Tolerance	Øe (mm)	Øi (mm)	B (mm)	G (mm)	C (mm)	H (mm)	Øf (mm)	Weight (Kg)
2000	3000	5000									
1 1/2	1 1/2	1 1/2	RX20	76.20	58.74	8.73	4.62	19.05	3.18	-	0.24
-	-	2	RX20	76.20	58.74	8.73	4.62	19.05	3.18	-	0.24
2	-	-	RX23	93.27	69.45	11.91	6.45	25.40	4.24	-	0.52
-	2	2	RX24	105.97	82.15	11.91	6.45	25.4	4.24	-	0.60
-	-	3	RX25	109.54	92.08	8.73	4.62	19.05	3.18	-	0.64
2 1/2	-	-	RX26	111.92	88.10	11.91	6.45	25.4	3.78	-	0.68
-	2 1/2	2 1/2	RX27	118.27	94.45	11.91	6.45	25.4	4.24	-	0.78
3	3	-	RX31	134.54	110.72	11.91	6.45	25.4	4.24	-	0.87
-	-	3	RX35	147.24	123.42	11.91	6.45	25.4	4.24	-	0.95
4	4	-	RX37	159.94	136.12	11.91	6.45	25.4	4.24	-	1.03
-	-	4	RX39	172.64	148.82	11.91	6.45	25.4	4.24	-	1.15
5	5	-	RX41	191.69	167.87	11.91	6.45	25.4	4.24	-	1.23
-	-	5	RX44	204.39	180.57	11.91	6.45	25.4	4.24	-	1.34
6	6	-	RX45	221.85	188.11	11.91	6.45	25.4	4.24	-	1.66
-	-	6	RX46	222.25	195.27	13.49	6.68	28.58	4.78	-	3.88
-	-	-	RX47	245.30	205.59	19.84	10.34	41.28	6.88	-	1.72
8	8	-	RX49	280.59	256.77	11.91	6.45	25.4	4.24	-	2.43
-	-	8	RX50	283.37	250.03	16.67	8.51	31.75	5.28	-	2.07
10	10	-	RX53	334.57	310.75	11.91	6.45	25.4	4.24	-	2.93
-	-	10	RX54	337.34	304.00	16.67	8.51	31.75	5.28	-	2.43
12	12	-	RX57	391.72	367.90	11.91	6.45	25.4	4.24	-	11.97
-	-	-	RX63	441.72	387.74	26.99	14.78	50.80	8.46	-	3.01
16	-	-	RX65	480.62	456.80	11.91	6.45	25.40	4.24	-	4.26
-	16	-	RX66	483.39	450.05	16.67	8.51	31.75	5.28	-	3.41
18	-	-	RX69	544.10	520.30	11.91	6.45	25.40	4.24	-	9.14
-	18	-	RX70	550.10	510.39	19.84	10.34	41.28	6.88	-	5.28
20	-	-	RX73	596.10	569.13	13.49	6.68	31.75	5.28	-	10.02
-	20	-	RX74	600.87	561.19	19.84	10.34	41.28	6.88	-	0.36
-	-	-	RX82	67.87	44.05	11.91	6.45	25.40	4.24	1.60	0.40
-	-	-	RX84	74.22	50.40	11.91	6.45	25.40	4.24	1.60	0.40
-	-	-	RX85	90.09	63.11	13.49	6.68	25.40	4.24	1.60	0.81
-	-	-	RX86	103.58	73.42	15.08	8.51	28.58	4.78	2.40	0.90
-	-	-	RX87	113.11	82.95	15.08	8.51	28.58	4.78	2.40	1.46
-	-	-	RX88	139.30	104.38	17.46	10.34	31.75	5.28	3.20	1.35
-	-	-	RX89	129.78	93.26	18.26	10.34	31.75	5.28	3.20	3.09
-	-	-	RX90	174.62	134.95	19.84	12.17	44.45	7.42	3.20	7.76
-	-	-	RX91	286.94	226.62	30.16	19.81	45.24	7.54	3.20	1.50
-	-	-	RX99	245.67	221.85	11.91	6.45	25.40	4.24	-	-
-	-	1 1/2	RX201	51.46	34.56	5.74	3.20	11.30	1.45	-	-
-	-	1 1/2	RX205	62.31	51.19	5.56	3.05	11.10	1.83	-	-
-	-	2 1/2	RX210	97.63	78.57	9.53	5.41	19.05	3.18	-	-
-	-	4	RX215	140.89	117.07	11.91	5.33	25.40	4.24	-	-
-	-	4 x 4 1/2	RX215	140.89	117.07	11.91	5.33	25.40	4.24	-	-

